

Side Mount Cart Handle

602328

New Product Announcement

DESCRIPTION

Our new Side Mount Carts offer another means of portable reeling. A simplistic design makes them lighter and more easily maneuverable. The square tubular steel frame resists deformation, even through heavy use and the baked-on powder coat guards against the elements. The cart, designed to be used with Reelcraft's 6 and 12 inch 30,000 Series reels, features a Zinc-plated 1/2" steel axle and 8" semi-pneumatic tires.

BENEFITS

- **Lightweight** Square tubular steel is lighter and still provides excellent strength and rigidity under normal use.
- **Superior Corrosion-Resistance** Painted components are powder coated prior to assembly to ensure universal coverage and maximum resistance to corrosion.
- **Easily Operated** Oversized 8" wheels enhance maneuverability and open design allows easy access to serviceable parts on the reel itself.

RELATED PRODUCTS

Reelcraft offers a full line of over 2,500 hose, cord and cable reels. For more information on this, or any other hose reel cart package, call or visit us on the Web at www.reelcraft.com.

NOTE: Cart comes with all fasteners needed to assemble. Also included, are bumpers (front & rear) for front mounting slots on 30,000 Series reel (reel sold separately).



602328 shown partially assembled.
NOT SHOWN: scuff bumpers & fasteners.



SPECIFICATIONS

MODEL (Handle Only)	HEIGHT	WIDTH	LENGTH	SHIPPING WEIGHT
	in / mm	in / mm	in / mm	lbs / kg
602328	42 1067	8 203	19.25 489	14 7

All prices subject to change, effective July 1, 2008. Dimensions are for cart assembled.

SPECIFICATIONS

- ✓ Zinc - plated 1/2" dia. axle
- ✓ Corrosion-resistant powder coating
- ✓ 8" semi-pneumatic tires
- ✓ Made from 1" square tubing
- ✓ Hose clip
- ✓ Fasteners and scuff bumpers included
- ✓ Fits most hand crank 30,000 series reels (6" and 12" models)
- ✓ Lightweight



602328 / SIDE MOUNT CART HANDLE

North America: 800-444-3134
Europe: +44 (0) 1536 406999
Pacific Rim: +63-45-599-3721
China: (519) 8512 2391
Latin America: 002-60-489-1685

Reelcraft Industries, Inc.

One Reelcraft Center / P.O. Box 248
Columbia City, IN 46725
FAX: 260-248-2605

www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

 **REELCRAFT**
Wind Things Up With Reelcraft™

6" and 12" Reels

Series 30,000

Product Announcement

DESCRIPTION

The Series 30,000 is designed for rugged, heavy duty applications and features a large storage capacity. The 602328 Side Mount Cart was specifically designed to be compatible with 30,000 Series 6" and 12" models. The cart and reel, as a package, offer a convenient and easily maneuverable option to store and transport long lengths of hose. Other reels not listed may be compatible. Consult manufacturer for more details.



Model Shown: CA32112 L

HOSE REELS


MODEL (without hose)	HOSE I.D.		LENGTH		PRESSURE		NOTES	WEIGHT	
	in / mm		ft / m		psi / bar			lbs / kg	
CA32106 L	1/2	13	100	31	1000	69	Air/Water	42	19
CA32112 L	1/2	13	200	61	1000	69	Air/Water	49	22
CA33106 L	3/4	19	50	16	1000	69	Air/Water	42	19
CA33112 L	3/4	19	100	31	1000	69	Air/Water	49	22
CA38106 M*	3/8	10	140	43	3000	207	Pressure Wash	44	20
CA38112 M*	3/8	10	300	91	3000	207	Pressure Wash	49	23

*Features a Super Swivel® for pressure wash. Maximum operating temperature 250°F (121°C)


CABLE STORAGE REELS

MODEL (without cable)	CABLE DESCRIPTION				O.D.		LENGTH		WEIGHT	
	AWG / mm²	Cond.	Type		in / mm		ft / m		lbs / kg	
CA30106-CS	10	5.37	3	SOOW	.643	17	225	69	40	19
	12	3.32	3	SEOW	.591	15	270	82		
	12	3.32	3	SJEOOW	.433	11	515	157		
	16	1.33	3	SJTO	.341	9	845	258		
CA30112-CS	10	5.37	3	SOOW	.643	17	455	138	46	21
	12	3.32	3	SEOW	.591	15	545	166		
	12	3.32	3	SJEOOW	.433	11	1030	314		
	16	1.33	3	SJTO	.341	9	1695	517		

Power source must be disconnected while reeling/dereeling. For cable sizes up to .969" O.D.

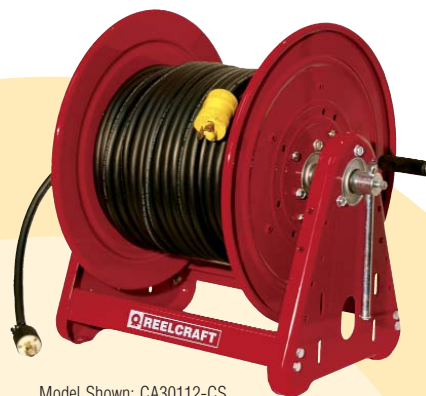

Model Shown: CA30112-CS

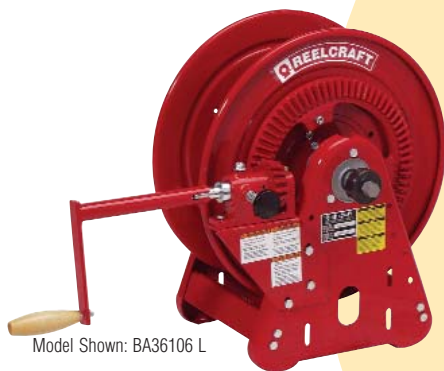

Model Shown: BA36106 L

TWIN WELDING HOSE REELS

MODEL (without hose)	I.D.		LENGTH		PRESSURE		NOTES	WEIGHT	
	in / mm		ft / m		psi / bar			lbs / kg	
BA36106 L	1/4	6	125	38	200	14	Bevel Crank	50	22
BA36112 L	1/4	6	250	76	200	14	Bevel Crank	57	25
BA36106 LT	1/4	6	125	38	200	14	Bevel Crank, T-Grade	50	22
BA36112 LT	1/4	6	250	76	200	14	Bevel Crank, T-Grade	57	25

SPECIFICATIONS

- ✓ Adjustable spool rotation drag
- ✓ Permanently lubricated dual main bearings
- ✓ All bolted construction
- ✓ Vibration-proof self-locking fasteners

North America: 800-444-3134

Europe: +44 (0) 1536 406999

Pacific Rim: +63-45-599-3721

China: (519) 8512 2391

Latin America: 002-60-489-1685

Reelcraft Industries, Inc.

One Reelcraft Center / P.O. Box 248

Columbia City, IN 46725

FAX: 260-248-2605

www.**reelcraft**.com

Reelcraft Industries is

ISO 9001:2000

Certified Since 1996

REELCRAFT
Wind Things Up With Reelcraft™

6" AND 12" REELS / SERIES 30,000