

SKF Microlog Analyzer AX

Advanced data collector/FFT analyzer

The SKF Microlog Analyzer AX is the most advanced large screen analyzer offered by SKF today. The AX's features allow you to capture a wide range of vibration data quickly.

The analyzer provides the flexibility to support the applications that are most important to your company's specific predictive maintenance program.



Key features

- Simultaneous triaxial or 4-channel measurements for fast data collection
- 806 MHz Xscale processor means faster real time rate and display updates
- Rugged, dust/water-proof IP65 design for reliability in industrial environments
- Rechargeable lithium battery supports 8 hours of continuous data collection
- Large 6.4" VGA color display for easy viewing and analysis in any light

Combines with SKF @ptitude software for in-depth analysis and reporting

SKF Microlog AX connects seamlessly with SKF @ptitude Analyst 4.1 software for single users and can be networked facility-wide using SKF @ptitude Monitoring Suite. The addition of SKF @ptitude Decision Support allows communication with your facility's CMMS or EAM system and automates reliability maintenance decision making by identifying probable faults and prescribing appropriate action.

SKF Microlog AX is a full-featured, 4-channel, high performance route and off-route portable data collector / FFT analyzer.

Application modules to customize SKF Microlog AX

The SKF Microlog AX has a modular design to allow users to select application modules to suit their individual requirements.

- **AX-M model** – 4-channel off-route / 2-channel or simultaneous triaxial route Analysis and 2-channel Balancing modules are already installed. The AX-M is upgradable to the AX-S or AX-F.
- **AX-S model** – All the features of the AX-M with the Bump Test and Data Recorder modules added.
- **AX-F model** – Further enhances capability by adding Run up Coast down (RuCd), Frequency Response Function (FRF) and Check to Conformance modules.

All modules can also be ordered separately.



SKF Microlog Analyzer AX

The AX takes the difficulty out of performing condition monitoring by analyzing vibration signal and process variables using 4-channel off-route measurements and one or two plane static or dynamic couple balancing applications over a range of 10 CPM (0,16 Hz) to 4,800,000 CPM (80 kHz). Bearing assessments are carried out using the industry proven SKF Acceleration Enveloping (gE) technology. The AX utilizes the latest advances in analog and digital electronics, including digital signal processing (DSP) and high resolution Sigma-Delta A/D converters, to provide both speed and accuracy in the data collection process.

Powerful software to complete your analysis system


SKF @ptitude Analyst provides fast, efficient and reliable storage, analysis and retrieval of complex machine data and makes the information accessible throughout your organization.

- Easy to learn and use for novice or experienced users
- Inter-connectivity with other software programs and systems
- Preference options let SKF @ptitude Analyst work the way you work




SKF Microlog AX provides fast data collection and analysis. The large screen facilitates viewing in any light.

SKF @ptitude Analyst is part of the SKF @ptitude Monitoring Suite, a comprehensive software suite that integrates data from a wide range of SKF portable and on-line acquisition devices.

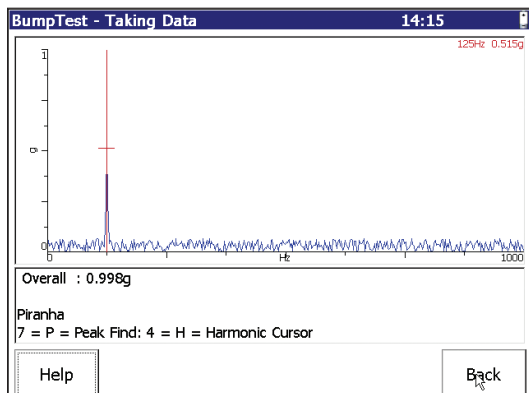


Bump Test module

A bump or rap test is an impact test carried out to excite the machine and measure its natural frequencies. This helps to determine if resonance is responsible for high noise or vibration levels or if there is a potential machinery problem.

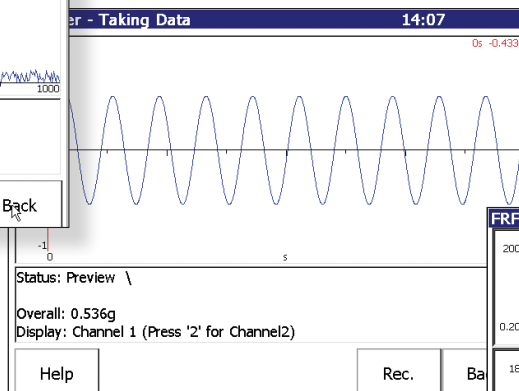


Recorder module

Signals from sensors connected to the AX are digitally recorded and stored as standard WAV files. These files can be sent via email or transferred directly to SKF @ptitude Analyst for post-processing. Using the storage capacity of SD cards allows a user to record many hours of continuous raw data.

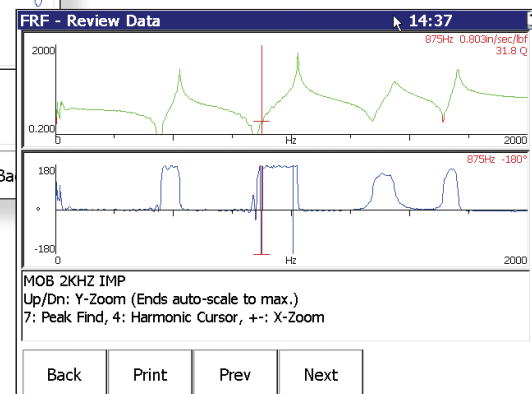

Frequency Response Function module

The FRF module establishes properties of mechanical structures (mass, stiffness and damping) by performing modal analysis using a calibrated hammer. Measurements can be exported to calculate and animate the mode shapes. The module also measures the transfer function (ratio) between two transducers while a machine is running. Measurements can be exported to calculate and animate the Operating Deflection Shapes (ODS).

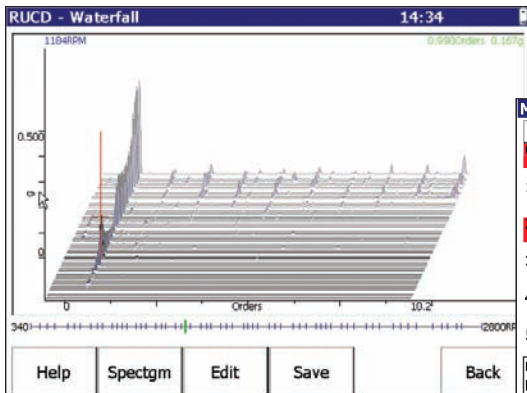

Pos	Dir	um rms	mm/s rms
0	Hor	1000	117
	Ver	1000	117
	Axi	---	---
1	Hor	---	---
	Ver	---	---
	Axi	---	---
2	Hor	1000	117
	Ver	1000	117
	Axi	---	---
3	Hor	---	---
	Ver	---	---
	Axi	---	---
4	Hor	---	---
	Ver	---	---
	Axi	---	---
5	Hor	---	---
	Ver	---	---
	Axi	---	---

Use up/down arrows to select measurement.
Press Fire to take measurement.
Left/right arrows toggle between grade/value.

Run up Coast down module

This module analyzes data from machines where noise or vibration levels are changing with speed, time or load (applications that cause transient phenomena) to establish the critical/resonant speeds of a machine. The module simultaneously acquires a noise or a vibration signal plus a tachometer signal and stores the data as a time waveform (a WAV file) for further analysis.

Check to Conformance module

The conformance check functionality transforms the AX into a tool for everyday inspection and maintenance routines. An automated assessment compares vibration levels with established limits and a pass or fail indication is displayed to check that the product complies with predefined quality indicators or required standards.

Specifications

Performance

Signal input: Accelerometer, velocity, displacement (from hand-held or installed transducers), AC/DC sensors, pressure sensors, temperature sensors, tachometer and manual entry

Measurement parameters: Acceleration, velocity, displacement, gE, temperature, phase, voltage, user specified

Measurement types: Overall, spectrum, time waveform, phase, orbits, shaft center line

Input channels:

- CH1: 6-pin Fischer CH1, CH2, CH3, CH4 (labeled R) (ICP™/AC/DC input), strobe out
- CH2: 6-pin Fischer CH2 & CH3 (ICP™/AC/DC input), +5 V tacho out
- USB HOST/CH R: 7-pin Fischer R (ICP™/AC/DC input), USB HOST, audio out
- USB DEV/TRIG/PWR: 7-pin Fischer USB DEV, charger, ext trigger aux, +5 V tacho out

Input signal range: ±25 V Maximum

Signal: RMS/Peak / Pk-Pk / True Peak / True Pk-Pk

Transducer check: Bias Voltage Integrity (o/c and s/c detection)

Auto range: Yes

Dynamic range: >90 dB

Frequency range: DC to 80 kHz

Bearing condition: gE

gE filters: 5 Hz – 100 Hz, 50 Hz – 1 kHz, 500 Hz – 10 kHz, 5 kHz – 40 kHz

FFT resolution: 100 – 25,600 lines

Time block length: 256 – 65,536 samples

Averaging: RMS, Time, Peak Hold

Alarms: Overall and Spectrum (Peak and RMS level)

Enclosures

Size: 220 x 220 x 71 mm

Weight: 1.54 Kg

Display: 6.4" TFT VGA, Backlit Color LCD, (640 x 480 resolution, 18 bit color)

Environmental

Sealing: EN60529 IP65 (Dust- and waterproof)

Drop test: 1.2 m (4 ft) – To MIL STD-810F (with stand retracted)

Temperature ratings:

- Operating temperature: –10 to +60 °C (+14 to +140 °F)
- Storage temperature: –20 to +60 °C (–4 to +140 °F)
- Humidity: 10 to 90 % RH, non-condensing at 0 to +50 °C (+32 to +122 °F)

Vibration: MIL STD-810 transportation

Certification:

- CE rated 
- CSA Class I, Div 2 Groups A, B, C & D, temperature Code T4A@Ta=50C

System

Communication:

- USB 1.1 (rear panel and docking station)
- Microlog protocol & Microsoft® ActiveSync®

User indicators: Blue, Green, Amber and Red LED's

Battery: Li-Ion 6600 mAh with integral gas gauging (8 hrs continuous operation minimum)

Battery recharge: Internally via docking station or external charger

Operating system: Microsoft® Windows® Embedded CE 6.0

Processor: Marvell 806 MHz PXA320

DSP: Freescale DSP56311

Memory

Internal RAM:

- 128 MB DDR SDRAM
- 128 MB NAND Flash

SD card: Can support up to 4 GB

Host software

The SKF Microlog AX series requires SKF @ptitude Analyst version 4.1 or later and USB communications.

SKF Microlog Analyzer AX – Advanced data collector/FFT analyzer

Ordering information

SKF Microlog AX-F model Data Collector/FFT Analyzer

The AX-F [CMXA 80-F-K-SL] standard kit includes:

- CMXA 80-F-SL unit, programmed for 4-channel off-route measurements, 2-channel or simultaneous triaxial route and one or two plane static or dynamic couple balancing application, Bump Test, Data Recorder, RuCd, FRF and Check to Conformance modules.
 - CD-ROM, user manuals, utilities, asset information page and literature
 - USB/power splitter cable [CMAC 5019]*
 - USB/A to B cable [CMAC 5082]
 - SD slot/dock connector cover [CMAC 5083]
 - Docking station [CMAC 5068]*
 - Battery pack [CMAC 5070]*
 - Cable, power cord, UL 110, US [CMVA 3351]*
 - Power adapter/battery charger [CMAC 5022]
 - Two (2) accelerometer, low profile, Non-NI Certified [CMSS 2200]*
 - Two (2) cable, sensor, coiled [CMAC 5209]*
 - Two (2) magnetic base accelerometer, medium duty, 1-1/2" (3.81 cm) diameter [CMSS 908-MD]*
 - Hard service carrying case [CMAC 5069]*
 - Soft case [CMAC 5071]*
 - Two (2) hand straps [CMAC 5072]*
 - Shoulder strap [CMAC 5073]*
 - Two (2) screen protectors [CMAC 5074]*
 - Fischer connector dust covers [CMAC 5075]*
 - 1 GB SD Card [CMAC 5077]
- * also available as separate accessory

SKF Microlog AX-S model: 4-channel off-route/ 2-channel route or simultaneous triaxial route, Balancing, Bump Test and Recorder modules.

SKF Microlog AX-M model: 4-channel off-route/ 2-channel route or simultaneous triaxial route and Balancing modules.

Field Upgrades to AX Series

- AX series Bump Test field upgrade [CMXA 80-BMP-SL]
- AX series Data Recorder field upgrade [CMXA 80-REC-SL]
- AX series Run up Coast down field upgrade [CMXA 80-RUCD-SL]
- AX series Frequency Response Function (FRF) field upgrade [CMXA 80-FRF-SL]
- AX series Check to Conformance field upgrade [CMXA 80-CTC-SL]
- AX-M to AX-S series field upgrade [CMXA 80-AXM/S-SL]
- AX-M to AX-F series field upgrade [CMXA 80-AXM/F-SL]
- AX-S to AX-F series field upgrade [CMXA 80-AXS/F-SL]

Optional Accessories

A number of accessories are available to complement the AX series.

Hardware

- Laser Tachometer Kit [CMAC 5030-K]
- Microlog Phase Reference Holder [CMSS 6156]
- Microlog Field Balancing Kit (with Optical Sensor) [CMCP 850-01]
- Microlog Field Balancing Kit (with Laser Sensor) [CMCP 850-02]
- Microlog Field Balancing Kit (with Laser Sensor) [CMCP 850-03]
- AC / DC Current Clamp [CMAC 5208]
- Infrared Temperature Gun [CMAC 4200-SL]
- Optical Phase Reference Kit [CMSS 6155X-K-CE]
- Laser Phase Reference Kit [CMSS 6195AX-K-CE]
- Modal Hammer Kit with accelerometer to measure masses of 210 grams and above [CMAC 5056-GXH-K-1]
- Modal Hammer Kit with accelerometer to measure masses of 56 grams and above [CMAC 5057-GXH-K-2]
- Modal Hammer Kit only [CMAC 5058]

Battery and power supply

- Battery charger with universal power supply [CMAC 5076]

Accelerometers

- Triax Accelerometer Kit [CMAC 4370-K]
- Accelerometer, small footprint, integrated 2 meter cable, supplied with magnetic mount [CMSS 2111]
- Accelerometer, high frequency [CMSS 2114]
- Accelerometer, CSA rated [CMSS 797-CA]

Cables

- BNC tachometer input (1 meter) [CMAC 5211]
- Ch X Signal input extension cable (5 meter) [CMAC 5026]
- Ch X Signal input extension cable (10 meter) [CMAC 5037]
- Tachometer (5030-K) extension cable (5 meter) [CMAC 5043]
- Tachometer (5030-K) extension cable (10 meter) [CMAC 5044]
- Cable convertor, 2-pin Mil/BNC [CMAC 3715]
- Triaxial accelerometer cable for use with triax accelerometer kit CMAC 4370-K [CMAC 5009]
- Audio headphone cable [CMAC 5078]

International Accessories

NOTE: The North American cord sets will be shipped with all new units.

International power cord accessories, two (2) cord sets will be provided, the standard North American power cord and the requested International power cord.

- Power cord, Australia [CMAC 4222-AU]
- Power cord, Switzerland [CMAC 4222-CH]
- Power cord, Denmark [CMAC 4222-DK]
- Power cord, European [CMAC 4222-EUR]
- Power cord, Israel [CMAC 4222-IL]
- Power cord, Italy [CMAC 4222-IT]
- Power cord, Japan [CMAC 4222-JP]
- Power cord, United Kingdom [CMAC 4222-UK]

For additional information on SKF Reliability Systems products, contact:

SKF Reliability Systems

5271 Viewridge Court • San Diego, California 92123 USA
Telephone: +1 858-496-3400 • Fax: +1 858-496-3531

Web Site: www.skf.com/cm/microlog

© SKF, Microlog and @ptitude are registered trademarks of the SKF Group.
Microsoft, Windows and ActiveSync are registered trademarks of Microsoft Corporation.
All other trademarks are the property of their respective owners.

© SKF Group 2008

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein. SKF reserves the right to alter any part of this publication without prior notice.

SKF Patents include: #US04768380 • #US05679900 • #US05845230 • #US05854553 • #US05992237 • #US06006164 • #US06199422 • #US06202491 • #US06275781 • #US06489884 • #US06513386 • #US06633822 • #US6,789,025 • #US6,792,360 • US 5,633,811 • US 5,870,699 • #WO_03_048714A1

Publication **CM2389 EN** (November 2008) • Printed in the United States of America on environmentally friendly paper.

Product Support Plans

A range of Product Support Plans are available to protect your investment. Contact your local SKF Reliability Systems sales representative for additional information.

